

IMPULSE CARTRIDGE TM-BBU-35


APPLICATION

The impulse cartridge TM-BBU-35 is used for activating infrared decoy flare TM-M206 1 x 1 x 8 inches and chaff countermeasure TM-RR-170 1 x 1 x 8 inches.

This TARA Aerospace and Defence Products AD Impulse Cartridge has been assigned with the Nato Codification System Number **NSN 1377-77-000-0094**.

TECHNICAL SPECIFICATIONS

Length	14 mm
Body Diameter	12.7 mm
Rim Diameter	16 mm
Weight	4.6 g
Weight of explosive substance	0.55 g
No fire current	1 A for 5 min.
All fire current	4,25 A
Ignition delay	max 15 ms
Electrical resistance of circuit kindle	0.8 - 1.2 Ω
Max pressure in a 45cm closed bomb	30 - 55 bar
UN Number	0323
ADR Number	1.4S
Packing Group	II

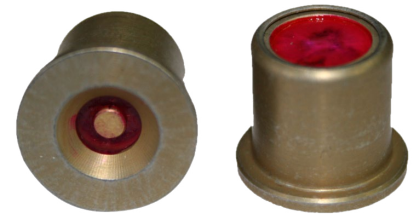

PACKING

Standard packing consists of 1008 cartridges in metal box.
Dimensions 306 x 156 x 192 mm.

Net weight: 4.7 kg.
Gross weight: 7.7 kg.

SHELF LIFE

Storage life: 10 years.